


Specification Sheet



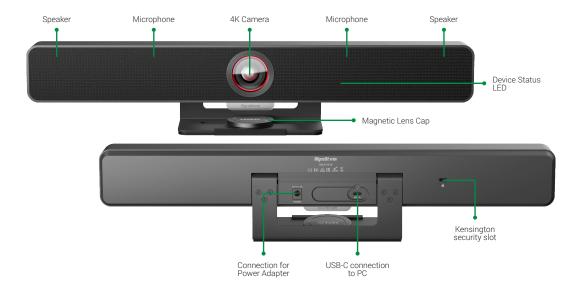

WyreStorm - Powerful. Reliable. Simple.

Introduction

The Halo VX10, part of the Halo series of WyreStorm Office products, are designed for small to medium sized meeting rooms, huddle spaces and the evergrowing home office. The VX10 is a quality video bar that integrates a speakerphone and camera into one device. Simple plug-and-play installation gives the presenter access to a wide angle 4K camera with enhanced features including presenter & speaker tracking, auto framing and anti-flicker. The microphone offers superior audio pickup at any angle of the room, all while canceling unnecessary noise with it's built in Acoustic Echo Cancellation technology. Lastly, the built in speaker boasts two 5 watt speakers, filling the room for a crystal clear and accurate audio experience.

Key Features

- Wide angle 4K video camera with 120° FOV
- 4x MEMS digital microphone arrays with a range of 3 \sim 5 meters and an angle of 180°
- 2x 3W Stereo full range speakers with passive radiator bass enhancement.
- Includes AEC (Acoustic Echo Cancellation), AGC (Automatic Gain Control), ANS (Automatic Noise Suppression) and full duplex mode communication

In the Box

1x HALO VX10 Video Bar 1x 5m USB-C to USB A Cable 1x 12V DC Power Supply (UK/US/EU/AU) 1x Wall Mount Kit 1x Magnetic Lens Cap 1x QuickStart Guide to make all participants feel like they are in the same room. Auto Framing / Speaker Tracking / Presenter Tracking based on Al

- technology makes meetings more intimate and friendly.
- Plug and play with excellent compatibility for OS and UC applications, such as Zoom, WebEx, Tecent meeting, Teams, etc.
- Provides Windows App for easy control

Specifications

Audio and Video	
Inputs/Outputs	1x USB-C Input
Speakerphone	
Microphone	4x MEMS mic array, AEC ANS Pickup Range: 180° up to 5m
Speaker	2x 3 Watt
Camera	
Sensor	1/2.8", CMOS, Effective Pixel: 8.0M
Video Resolution Max.	3840x2160p @30Hz 1920x1080 @60Hz 1280x720 @90Hz
Output Encoding	MJPEG/YUV2/H.264/H.265 UVA UVC 1.1
FOV	120°
Additional Features	White Balance: Auto Backlight Compensation: Auto DNR: 2D & 3D ePTZ: Supported 5x digital zoom Presenter Tracking: Supported Speaker Tracking: Supported Auto-Framing: Supported
Communication and Control	
Control Option	Controlled via App
Power	
Power Supply	12V DC 2A
Max Power Consumption	6W
Environmental	
Operating Temperature	0 ~ +40°C (32 ~ +104 °F), 10% ~ 90%, non-condensing
Storage Temperature	-20 to +60°C (-4 to + 140°F), 10% to 90%, non-condensing
Maximum BTU	20.47 BTU/hr
Dimensions and Weight	
Height	97.5mm/3.85in (with stand)
Width	460mm/18in
Depth	61mm/2.4in
Weight	0.81kg/1.78lbs
Regulatory	
Safety and Emission	CE FCC RoHS EAC RCM

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.